




SLP (UK) LIMITED
LIGHTING & CEILING COMPONENTS


P25 Thin Reed

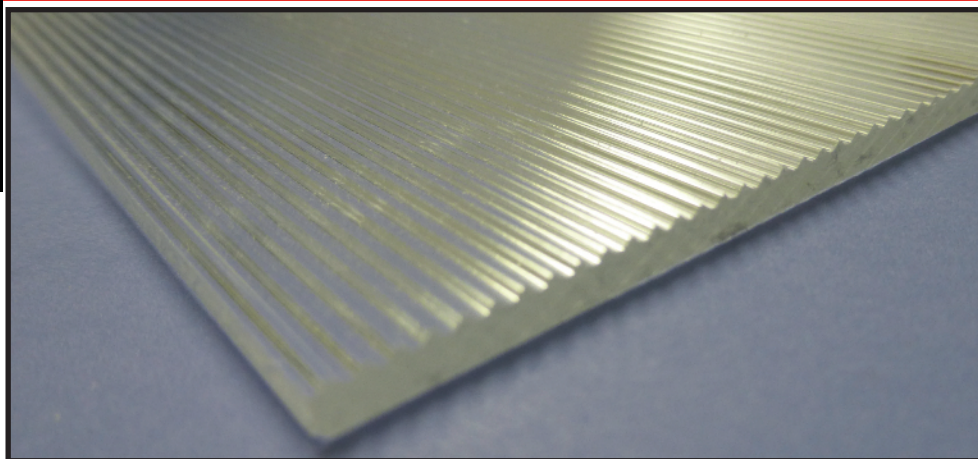

The P25 Clear Linear Prism is distinctive due to the design of the prism across the width of the sheet. The linear prisms are finished with a textured surface to help eliminate the lamp image and increase the sheets light transmission consistency.

The P25 has a very broad light spread with lamp positions parallel to the axis of the prisms. With the lamp axis at 90° to the prism axis, the lense produces a narrower but very precise distribution especially suited to task lighting. The P25 Lense material can be supplied in either standard sizes or cut to customer's individual requirements.

	P25 Thin Reed
Material	Acrylic (PMMA)
Pattern	P25 0.5 mm Pitch
Thickness	3.0 mm
Tolerance on Thickness	10%
UV Stability	Good
Colours Available	Clear
Max Operating Temp.	70 C
Stocked sizes	2050 x 1650 mm

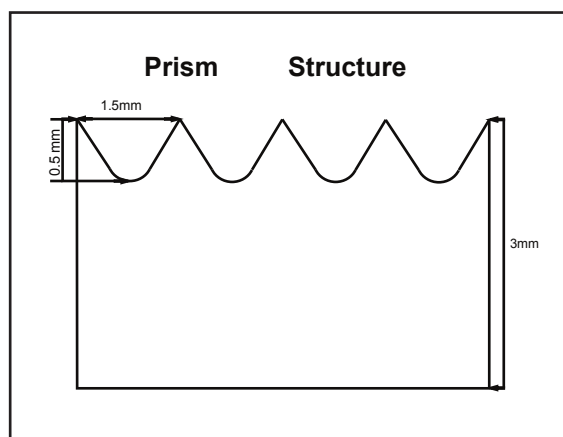

Prismatic Lenses